
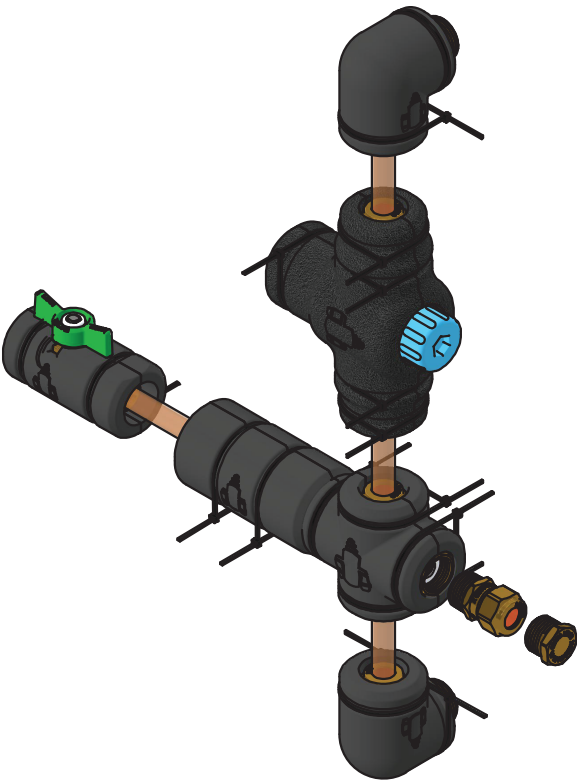


Storage Hot Water Installation Kit

500kPa

HWKIT-02

Product Specifications

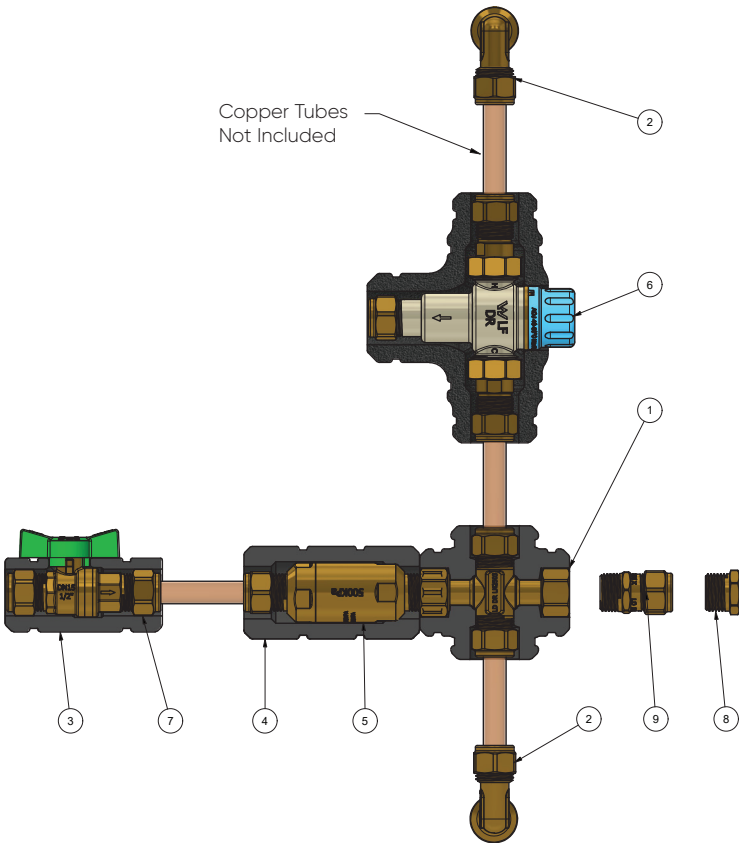

Specifications

Working Temperature: 1°C to 80°C

Maximum Pressure Rating: 1400kPa

Component Chart

Item	Qty	Part Code	Material
1	1	AW419LF	Tee Swivel Nut 15FI x 15FI x 15C x 15C Lead Free
2	2	AW4142LF	Copper Compression Elbow Reducing Extended 20MI x 15C BR Lead Free
3	1	ICDFC15OEM	PU Cover to Suit DFC
4	1	ICP15OEM	PU Cover to Suit PLV
5	1	PLV15C-500LF	Pressure Limiting Valve 500kPa 15MM C x C Lead Free
6	1	TV15LF	Tempering Valve 15MM Lead Free
7	1	WDFC15LF	Dual Isolation Non Return Ball Valve with Check Valve Copper Compression Lead Free
8	1	AW722LF	Hexagonal Plug Brass 15mm BSPP Lead Free
9	1	AW2110NBLF	Copper Compression Union Brass 15MI x 15C Lead Free

For more information on Logi Valve, contact:
Austworld 15 Activity Crescent, Molendinar, Queensland 4214 Australia
P. 1300 780 430 F. 1300 780 441 E. info@austworld.com.au

Austworld Pty Ltd. All rights reserved 2018. Austworld and Logi Valve are registered trade mark belonging to Austworld Pty Ltd.

Revision no. 1.1 | 11/03/2024

Features



- Lead Free Watermark approved
- Integral non return and isolation function
- Suitable for horizontal and vertical installation
- Protection of hot water system components, domestic applications and general plumbing works
- Insulation jacket provided as per AS3500.4
- Tested and certified to:
AS4032.2 | AS4796 | AS1357 | AS3688

